

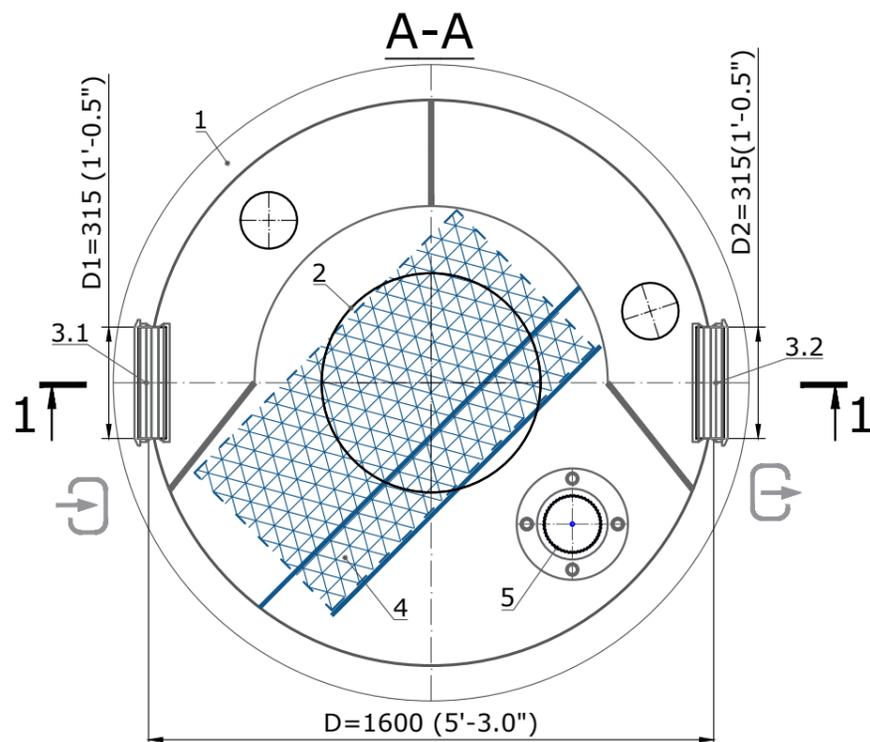


# Oil/Water Separator OilBase100-10/50 (160/795 gpm) with Bypass (S 1:20)

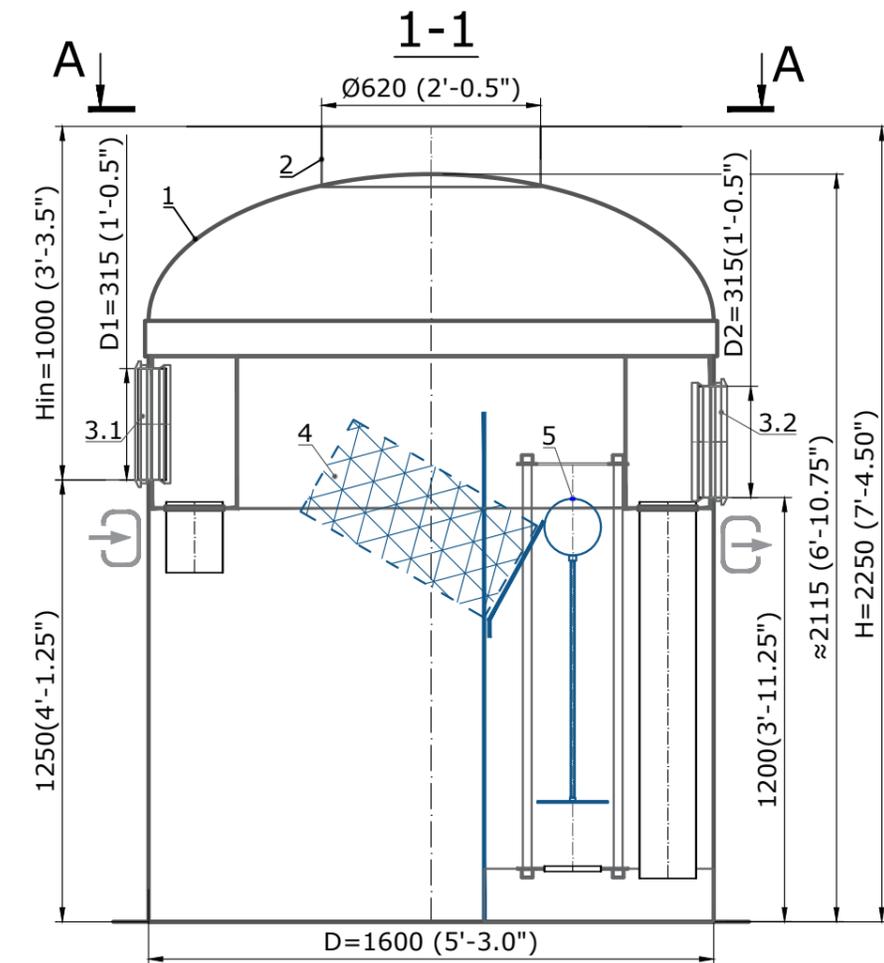

## 3D visualization

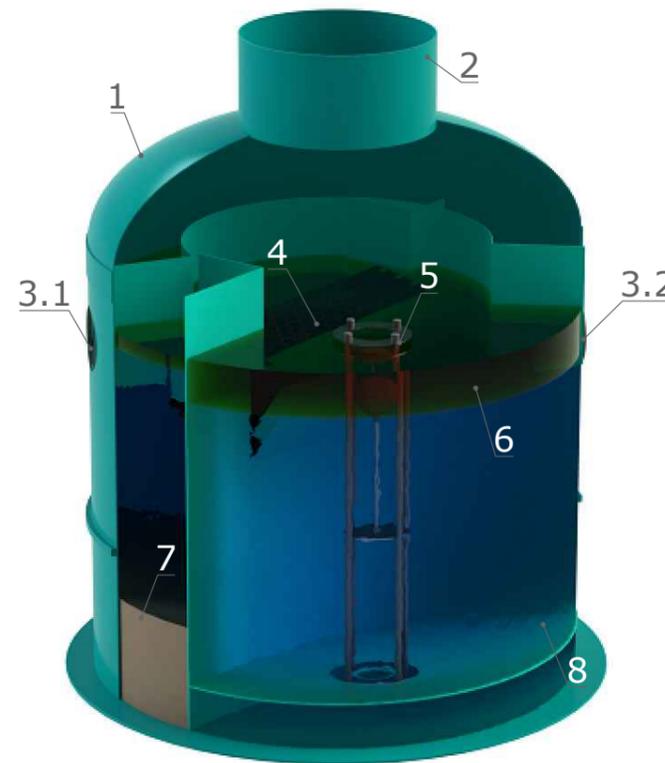

## Specification of materials and equipment. Standard equipment\*(Table 1)

Pos.	Name	Q-ty	Mass, kg	Note
1	Oil/Water Separator Vodaland OilBase100-10/50, with Bypass, flow rate 10 l/s (160 gpm), Bypass-50 l/s (795 gpm), fiberglass, D=1600 (5'-3.0\"/>			
2	Manhole extension GRP Ø620 (2'-0.5\"/>			
3.1, 3.2	Rubber seal for pipe connection Ø315 (1'-0.5\"/>			
4	Coalescent block	1		compl.
5	Automatic locking device 160	1		compl.
6	Volume of light liquids	500/ 130		l/gal
7	Volume of sludge trap	1000/265		l/gal
8	Usable volume	2600/685		l/gal

The product is shipped according to Standard Equipment (Table 1), unless otherwise specified in the Additional Equipment (Table 2)

## Additional equipment (Table 2)

<input type="checkbox"/> Fiberglass lid Ø620 (2'-0.5\"/> 	<input type="checkbox"/> Plastic manhole cover, class A 	<input type="checkbox"/> Cast iron manhole cover, class <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D 
<input type="checkbox"/> Neck extension Ø620  <input type="checkbox"/> h=500mm(1'-7.75\"/> <input type="checkbox"/> h=1000mm(3'-3.5\"/> <input type="checkbox"/> h=1500mm(4'-11.0\"/>	<input type="checkbox"/> Fiberglass adaptor plate Ø620 	<input type="checkbox"/> Universal ladder 

Note:  
 \*Hin-depth of the inlet connection (in standard equipment Hin up to 1000 mm (3'-3.5\"/>

## Additional Information:

<b>Oil/Water Separator OilBase100-10/50 with Bypass</b>	VODALAND USA 3120 Riverport Tech Center Dr, Maryland Heights, MO 63043 +1 (314) 350 84 85
Factory ID: <b>OB1-10/ 50</b>	
Material: reinforced fiberglass	Date: 01/ 2025