




# Oil/Water Separator OilBase100-3/15 (15/240 gpm) with Bypass (S 1:15)

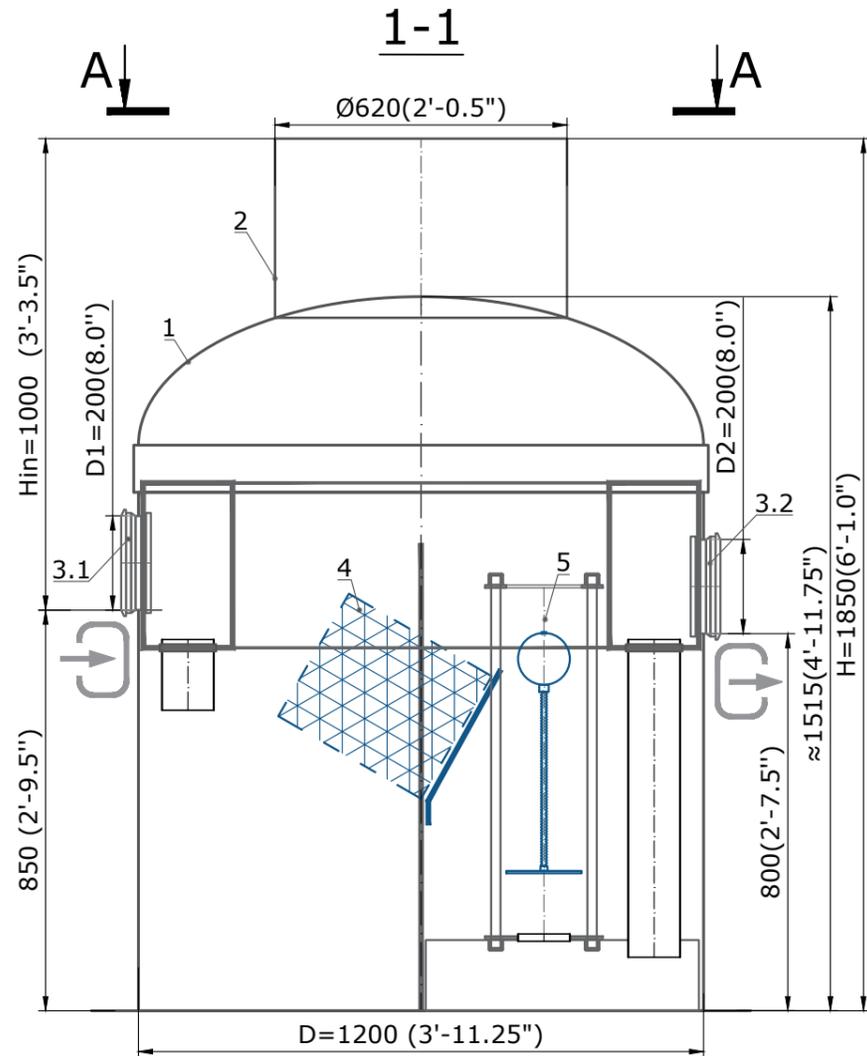

A-A

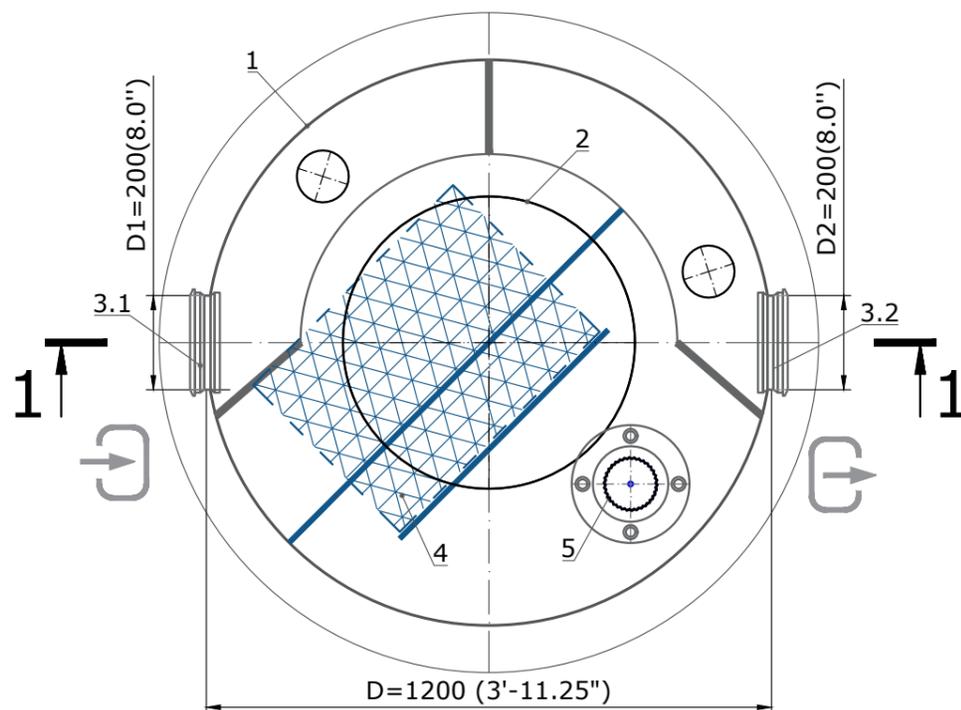

## 3D visualization

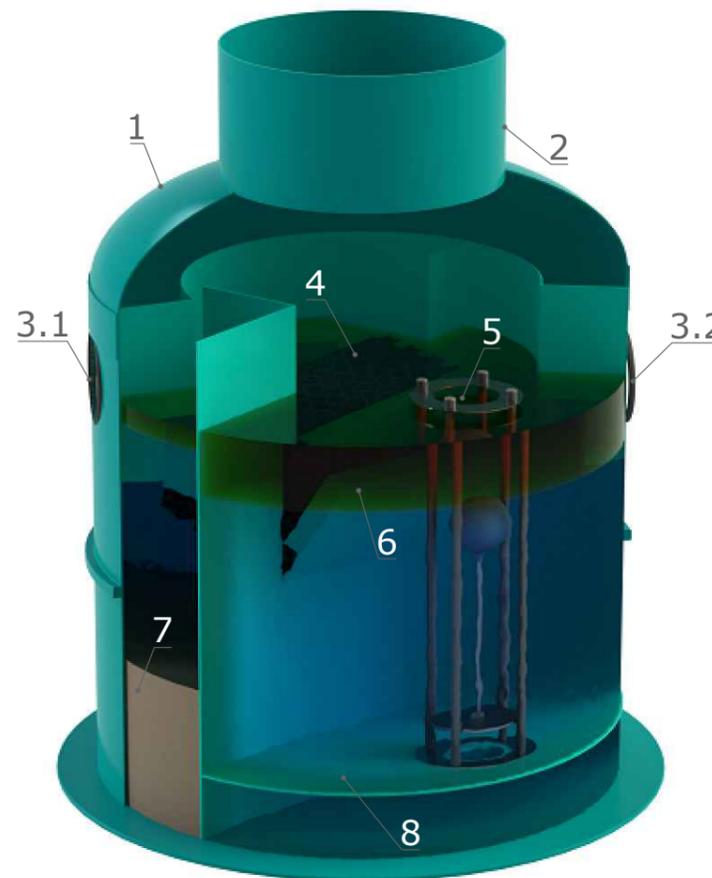

## Specification of materials and equipment. Standard equipment\*(Table 1)

Pos.	Name	Q-ty	Mass, kg	Note
1	Oil/Water Separator Vodaland OilBase100-3/15 with Bypass, flow rate 3 l/s (15gpm), Bypass-15 l/s (240 gpm), fiberglass, D=1200(3'-11.25"), H=1850mm (6'-1.0")	1	173	compl.
2	Manhole extension GRP Ø620 (2'-0.5")	1		compl.
3.1, 3.2	Rubber seal for pipe connection Ø200 (8.0")	1/ 1		compl.
4	Coalescent block	1		compl.
5	Automatic locking device 110 (4.5")	1		compl.
6	Volume of light liquids	150/ 40		l/gal
7	Volume of sludge trap	300/ 80		l/gal
8	Usable volume	1020/270		l/gal

The product is shipped according to Standard Equipment (Table 1), unless otherwise specified in the Additional Equipment (Table 2)

## Additional equipment (Table 2)

<input type="checkbox"/> Fiberglass lid Ø620 (2'-0.5") 	<input type="checkbox"/> Plastic manhole cover, class A 	<input type="checkbox"/> Cast iron manhole cover, class <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D 
<input type="checkbox"/> Neck extension Ø620  <input type="checkbox"/> h=500mm(1'-7.75") <input type="checkbox"/> h=1000mm(3'-3.5") <input type="checkbox"/> h=1500mm(4'-11.0")	<input type="checkbox"/> Fiberglass adaptor plate Ø620 	<input type="checkbox"/> Universal ladder 

Note:  
 \*Hin-depth of the inlet connection (in standard equipment Hin up to 1000 mm (3'-3.5"))  
 \*\*The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole  
 \*\*\*Permissible deviation during production of products is 1-3%.

## Additional Information:

**Oil/Water Separator OilBase100-3/15 with Bypass**

VODALAND USA  
 3120 Riverport Tech Center Dr,  
 Maryland Heights, MO 63043  
 +1 (314) 350 84 85

Factory ID: **OB1-3/15**



Material: reinforced fiberglass Date: 01/ 2025