

# Oil/Water Separator OilBase100-15/75 (240/1190 gpm) with Bypass (S 1:20)

Specification of materials and equipment.  
Standard equipment\*(Table 1)

Pos.	Name	Q-ty	Mass, kg	Note
1	Oil/Water Separator Vodaland OilBase100-15/75, with Bypass, flow rate 15 l/s (240 gpm), Bypass-75 l/s (1190 gpm), fiberglass, D=1800 (5'-11.0"), H=2200mm (7'-2.75")	1	373	compl.
2	Manhole extension GRP Ø620 (2'-0.5")	1		compl.
3.1, 3.2	Rubber seal for pipe connection Ø315 (1'-0.5")	1/ 1		compl.
4	Coalescent block	1		compl.
5	Automatic locking device 160	1		compl.
7	Volume of light liquids	750/ 200		l/gal
8	Volume of sludge trap	1500/400		l/gal
9	Usable volume	3300/870		l/gal

The product is shipped according to Standard Equipment (Table 1), unless otherwise specified in the Additional Equipment (Table 2)


## Additional equipment (Table 2)

<input type="checkbox"/> Fiberglass lid Ø620 (2'-0.5") 	<input type="checkbox"/> Plastic manhole cover, class A 	<input type="checkbox"/> Cast iron manhole cover, class <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D 
<input type="checkbox"/> Neck extension Ø620  <input type="checkbox"/> h=500mm(1'-7.75") <input type="checkbox"/> h=1000mm(3'-3.5") <input type="checkbox"/> h=1500mm(4'-11.0")	<input type="checkbox"/> Fiberglass adaptor plate Ø620 	<input type="checkbox"/> Universal ladder 

Note:  
 \*Hin-depth of the inlet connection (in standard equipment Hin up to 1000 mm (3'-3.5"))  
 \*\*The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole  
 \*\*\*Permissible deviation during production of products is 1-3%.

### Additional Information:

<b>Oil/Water Separator OilBase100-15/75 with Bypass</b>		VODALAND USA 3120 Riverport Tech Center Dr, Maryland Heights, MO 63043 +1 (314) 350 84 85
Factory ID:	<b>OB1-15/75</b>	
Material: reinforced fiberglass	Date: 01/ 2025	

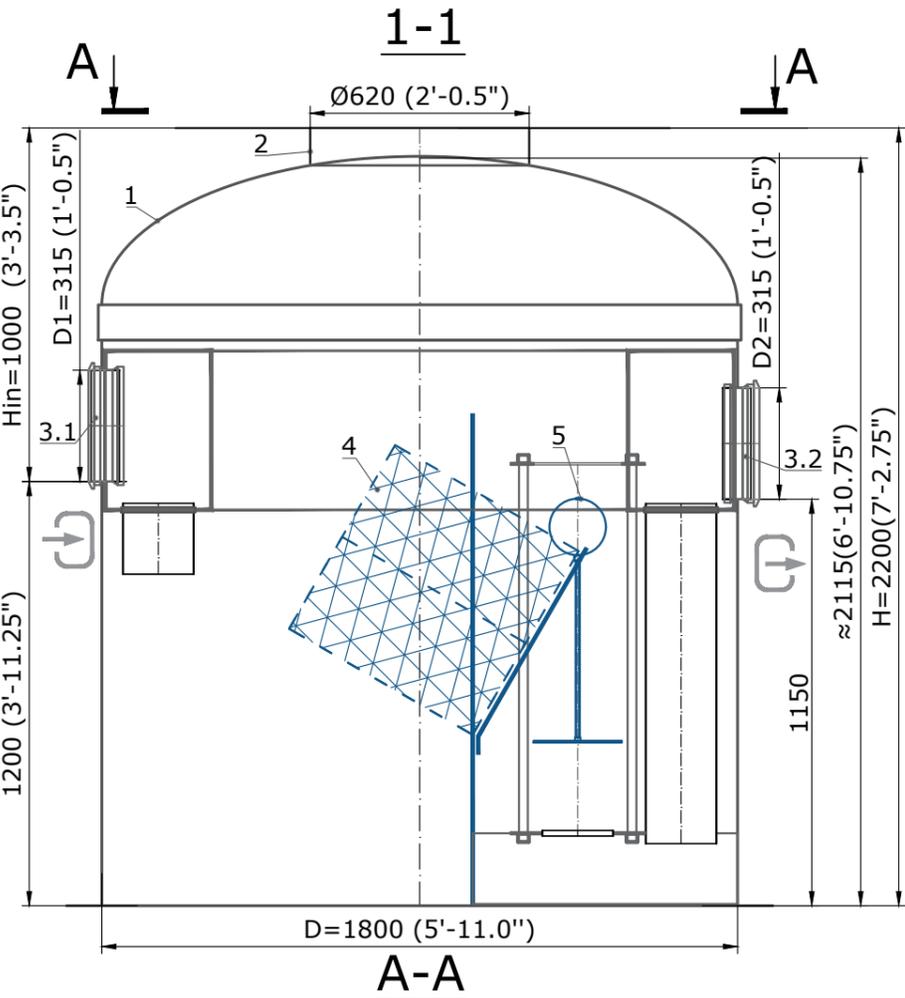

## 3D visualization

