


Grease separator MegaBaseH-15 (S 1:20)

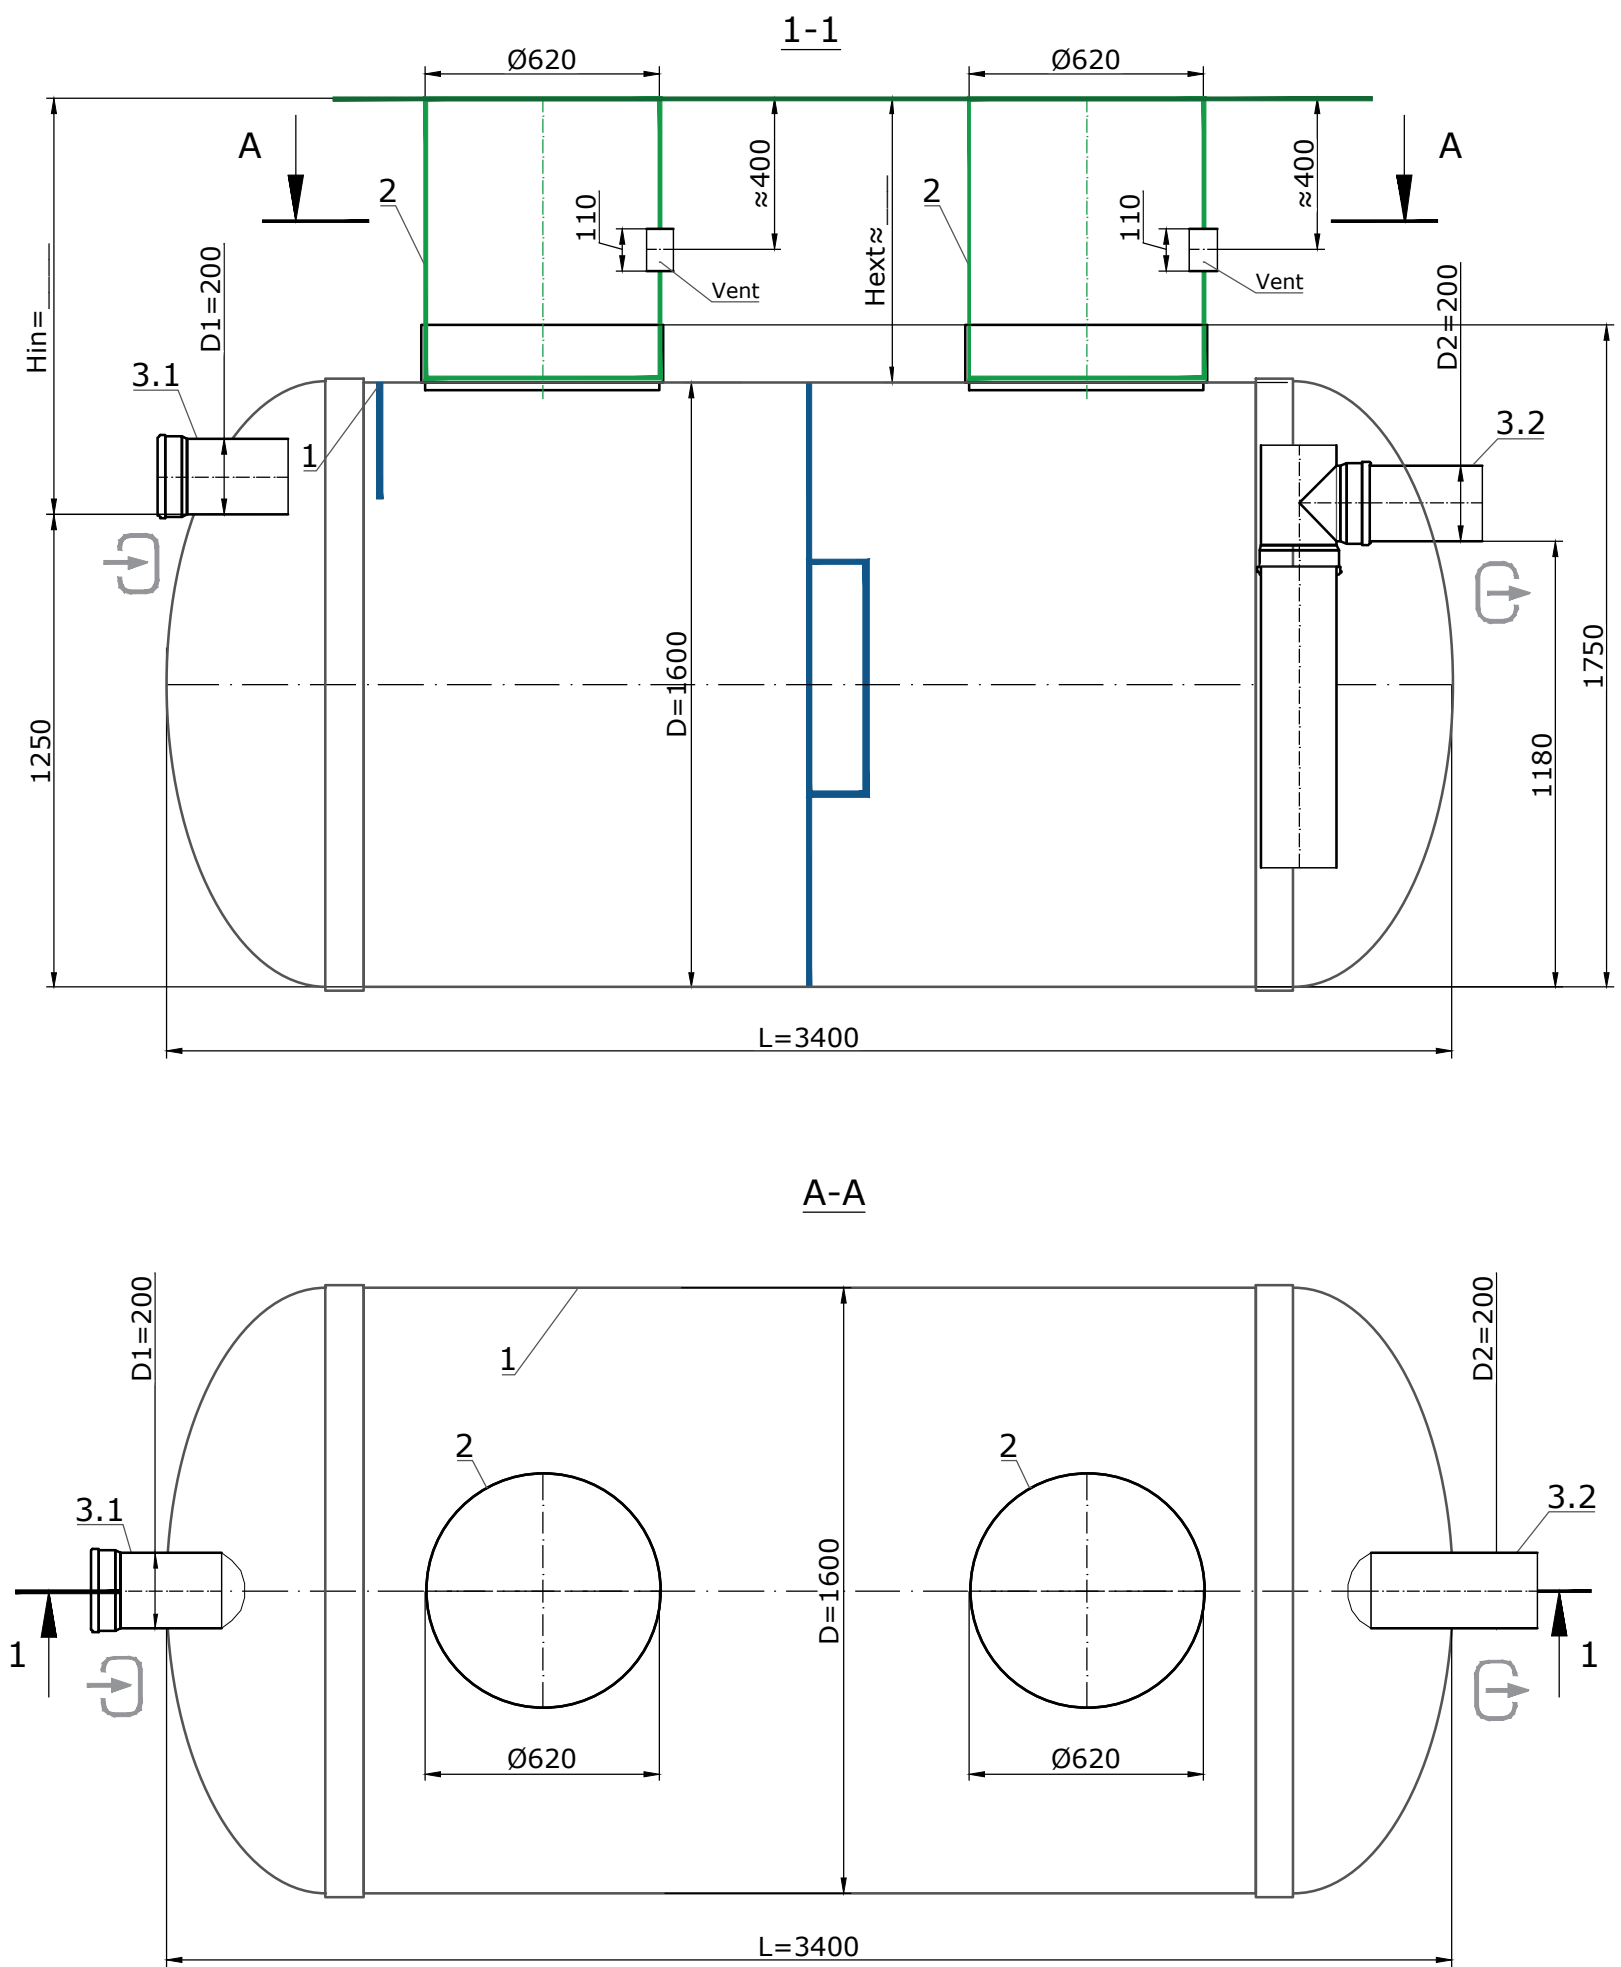

Specification of materials and equipment.
Standard equipment*(Table 1)

Pos.	Name	Q-ty	Wgt., kg	Note
1	Grease separator Vodaland GMBH-15 with sludge trap, water flow 15 l/s, fiberglass, D=1600mm, L=3400mm	1		compl.
2	Manhole extension GRP Ø620(2'-0.5")	2		compl.
3.1, 3.2	PVC pipe connection D200 SN4(8)	1/1		compl.
	Volume of light liquids, L	1725		
	Volume of sludge trap, L	1500		
	Usable volume, L	6840		

The product is shipped according to Standard Equipment (Table 1), unless otherwise specified in the Additional Equipment (Table 2)

Additional equipment (Table 2)

☐ Fiberglass lid Ø620(2'-0.5")

☐ Plastic manhole cover, class A

☐ Cast iron manhole cover, class
☐ B ☐ C ☐ D

☐ Neck extension Ø620(2'-0.5")

☐ h=500mm(1'-7.75")
☐ h=1000mm(3'-3.5")
☐ h=1500mm(4'-11.0")

☐ Fiberglass adaptor plate Ø620(2'-0.5")

☐ Universal ladder

☐ Sediment/sand level sensor

☐ Light liquids sensor

Note:
*Hin-depth of the inlet connection (in standard equipment Hin up to 1000 mm).
**The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole
***Permissible deviation during production of products is 1-3%.

Additional Information:

Grease Separator BaseH-15

VODALAND USA
3120 Riverport Tech Center Dr,
Maryland Heights, MO 63043
+1 314 717 15 51

Factory ID: **GMBH-15**

Material: reinforced fiberglass Date: 11/ 2025